


CHIMNEY HOODS • BUILT-IN HOBS



KITCHEN APPLIANCES



Sleek and unobtrusive LED-lit touch controls

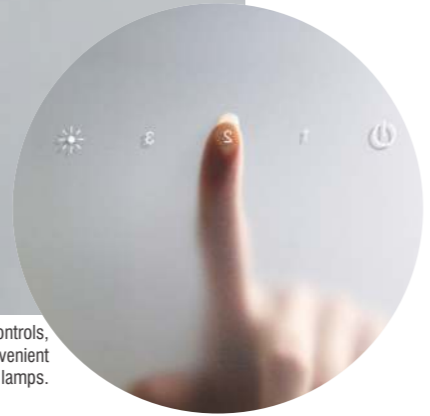

Sleek and unobtrusive LED-lit touch controls, allow you to select the speed at three convenient settings and to operate the powerful LED lamps.

- New**
Chimney GL 6071 TS (60/90)
- Timer with auto-Off function
 - Switches Off automatically
 - Airflow 1250 m³/h
 - LED Lights • Life time warranty
 - 1 year warranty on touch control panel
 - Baffle filter • FRP housing
 - Powerful efficient motor saves electricity
- (Also in black finish-GL 6071 TS Black)



A dash of colour in the kitchen

- Chimney GL 6077 SS (60/90)*
- Baffle filter • Airflow 1000 m³/hr
 - 2 powerful 40W lamps • FRP housing • Italian motor with TOP

A choice of contemporary shades



The perfect choice for a smoke and fume free kitchen

 GL 6071 TS IS (90)* • Airflow 1250 m ³ /h • Touch sensor control • 4x1.5 W LED lamps (also in push button GL 6071 IS)	 GL 1000 IS (90)* • Airflow 1250 m ³ /h • Electronic control • 4x1.5 W LED lamps	 GL 6052 IS (90)* • Airflow 1250 m ³ /h • Electronic control • 4x1.5 W LED lamps	 GL 1036 IS (90)* • Airflow 1250 m ³ /h • Digital control • 4x1.5 W LED lamps	 GL 1022 IS (90)* • Airflow 1250 m ³ /h • Digital control • 4x1.5 W LED lamps	 GL 6052 TS IS (90)* • Airflow 1250 m ³ /h • Touch sensor control • 4x1.5 W LED lamps	 GL 6065 (60/90)* • Airflow 1250 m ³ /h • Electronic control • 2x1.5 W LED lamps GLASS COLOURS						
 GL 6066 (90)* • Airflow 1250 m ³ /h • Digital control • 2x1.5 W LED lamps	 GL 6062 TS (60/90)* • Airflow 1250 m ³ /h • Touch sensor control • 2x1.5 W LED lamps (also in black finish)	 GL 6052 TOUCH (60/90)* • Airflow 1000/1250 m ³ /h • Auto Heat & Gas sensor • 2x1.5 W LED lamps (also available in PB) New Chimney with Auto Sensor	 GL 6076 (60/90)* • Airflow 1000 m ³ /h • Touch control • 2x2 W LED lamps	 GL 6067 (60/90)* • Airflow 1250 m ³ /h • Digital control • 2x1.5 W LED lamps	 GL 6051 (60/90)* • Airflow 1000/1250 m ³ /h • FRP/PDCA housing • 2x1.5 W LED lamps	 GL 6054 (60/90)* • Airflow 1000/1250 m ³ /h • FRP housing • 2x40 W lamps/2x1.5 W LED lamps	 GL 6055 (60/90)* • Airflow 1000/1250 m ³ /h • FRP/PDCA housing • 2x40 W lamps					
 GL 6062 (60/90)* • Airflow 1000/1250 m ³ /h • FRP/PDCA housing • 2x40 W lamps (also in black finish-GL 6062 BL)	 GL 6054 TS (60/90)* • Airflow 1000 m ³ /h • Touch sensor control • 2x1.5 W LED lamps	 GL 6071 BL (60/90)* • Airflow 1000/1250 m ³ /h • FRP/PDCA housing • 2x40 W lamps (also available in SS) Now with Twin Baffle Filters	 GL 6074 (90)* • Airflow 1000 m ³ /h • Remote/Touch control • 2x3 W LED lamps	 GL 6068 (60/90)* • Airflow 750 m ³ /h • FRP housing • 2x40 W lamps	 GL 6075 (60)* • Airflow 750/1000 m ³ /h • FRP housing • 2x40 W lamps	 GL 6057 (60/90)* • Airflow 1000/1250 m ³ /h • FRP/PDCA housing • 2x40 W lamps	 GL 6058 (60/90)* • Airflow 750 m ³ /h • FRP housing • 2x40 W lamps					
 GL 6073 (90)* • Airflow 1000 m ³ /h • FRP housing • 2x2 W LED lamps	 GL 6071 Split (60/90)* • Airflow 1250 m ³ /h • Indoor & outdoor units • PDCA housing • Italian motor with TOP Split Chimney	 GL 6059 (90)* • Airflow 1250 m ³ /h • Digital control • 3x1.5 W LED lamps	 GL 6071 GF (60/90)* • Airflow 1250 m ³ /h • FRP housing • 2x1.5 W LED lamps	<p>Straight-Line Chimneys</p>				 GL 6001 PB (60/70)* • Airflow 700 m ³ /h • FRP housing • 2x40 W lamps	 GL 6002 SL (60)* • Airflow 750/1000 m ³ /h • FRP housing • 2x40 W lamps	 GL 6003 PB (60)* • Airflow 700 m ³ /h • FRP housing • 2x40 W lamps (also available with Touch Sensor Glass Front)	 GL 6013 DX (60)* • Airflow 700 m ³ /h • FRP housing • 2x40 W lamps	 GL 6014 PB (60/90)* • Airflow 700 m ³ /h • FRP housing • 2x40 W lamps

BUILT-IN GLASS HOBS



**ITALIAN
DOUBLE RING BURNER**
specially designed for
Indian cooking

Outstanding aesthetics and efficient capability in cooking. Now with Double ring burners specially designed and developed by Sabaf, Italy for high heat Indian cooking.



GL 1073 IN BW with frame (73)*



GL 1074 IN BW with frame (77)*



GL 1022 SQF IN (66)*



GL 1073 SQF IN (73)*



GL 1074 SQF IN (70)*



GL 1074 IN (70)*



GL 1094 IN (90)*



GL 1095 IN (90)*



GL 1073 SQIN TR (73)*



GL 1064 SQIN TR (65)*



GL 1073 IN (73)*



GL 1063 RO IN (58)*



GL 1073 IN BW (73)*



GL 1074 IN BW (77)*

EUROPEAN SEALED BURNERS



GL 1064 TR (60)*



GL 1074 TR (70)*



GL 1094 TR (90)*



GL 1066 TR (60)*



GL 1073 TR (73)*



GL 1095 TR (90)*



Toughened Glass



Cast Iron Pan Supports



Triple Ring Burner



Integrated Auto Ignition



GL 1060 MXT Pro (60)*

• Stainless steel finish
Also available with MS pan supports GL 1061 TRSS

Technical Specifications**

Chimney Hoods

Features (GL)	Airflow (m ³ /h)	Motor Power (W)	Light (W)	Housing	Static Pressure	Control	Filter	Size (cms)
1000 IS	1250	180	1.5x4	PDCA	470	EL	BF	90
1022 IS	1250	180	1.5x4	PDCA	470	DG	BF	90
1036 IS	1250	180	1.5x4	PDCA	470	DG	BF	90
6052 IS	1250	180	1.5x4	PDCA	470	EL	BF	90
6052 TS IS	1250	180	1.5x4	PDCA	470	TC	BF	90
6071 IS	1250	180	1.5x4	PDCA	470	PB	BF	90
6071 TS IS	1250	180	1.5x4	PDCA	470	TC	BF	90
6051	1000/1250	155/180	1.5x2	FRP/PDCA	430/470	DG	BF	60/90
6052 TC	1000/1250	155/180	1.5x2	FRP/PDCA	430/470	TC	BF	60/90
6052	1000	155	40x2	FRP	430	PB	BF	60/30
6054	1000/1250	155/180	40/1.5x2	FRP	430/470	PB	BF	60/90
6054 TS	1000	155	1.5x2	FRP	430	TC	BF	60/90
6055	1000/1250	155/180	40x2	FRP/PDCA	430/470	SL/PB	BF	60/90
6057	1000/1250	155/180	1.5/40x2	FRP/PDCA	430/470	SL/PB	BF	60/90
6058	750	145	40x2	FRP	375	SL	BF	60/90
6059	1250	180	1.5x3	PDCA	470	DG	BF	90
6062	1000/1250	155/180	40x2	FRP/PDCA	430/470	PB	BF	60/90
6062 TS	1250	180	1.5x2	FRP	470	TC	BF	60/90
6065	1250	180	1.5x2	PDCA	470	DG	BF	60/90
6066	1250	180	1.5x2	PDCA	470	DG	BF	90
6067	1250	180	1.5x2	PDCA	470	DG	BF	60/90
6068	750	145	40x2	FRP	375	SL	BF	60/90
6071	1000/1250	155/180	40x2	FRP/PDCA	430/470	PB	BF	60/90
6071 Split	1250	180	40x2	PDCA	470	PB	BF	60/90
6071 TS	1250	180	1.5x2	FRP	470	TC	BF	60/90
6071 GF	1250	180	1.5x2	FRP	470	PB	BF	60/90
6073	1000	250	2x2	FRP	430	TC	CF	90
6074	1000	250	3x2	FRP	430	TC	CF	90
6075	750/1000	145/155	40x2	FRP	375	PB	BF	60
6076	1000	250	2x2	FRP	430	TC	CF	60/90
6077	1000	155	40x2	FRP	430	PB	BF	60/90

Straight-Line Chimneys

Features (GL)	Airflow (m ³ /hr)	Motor Power (W)	Light (W)	Housing	Static Pressure	Control	Filter	Size (cms)
6001	700	145x2	40x2	FRP	375	PB	CF/BF	60/70
6002	750/1000	145/155	40x2	FRP	375/430	SL/PB	BF	60
6003	700	145x2	40x2	FRP	375	PB/TC	BF	60
6013	700	145x2	40x2	FRP	375	SL	BF	60
6014	700	145x2	40x2	FRP	375	PB	BF	60/90

BF - Baffle Filter, CF - Cassette Filter, PDCA - Pressure Die Cast Aluminium, SL - Slider Control, FRP - Flame Retardant Plastic, PB - Push Button Control, TC - Touch Control, IS - Island Hood, DG - Digital Control, EL - Electronic Control

Built-in Hobs

Features (GL)	No. of Burners	Auxiliary Burner	Semi-Rapid Burner	Rapid Burner	Triple Ring Burner	Double Ring Burner	Auto Ignition	Hob W x D (mm)	Opening W1 x D1 (mm)
1022 SQF IN	2					2	◆	660x330	630x300
1073 IN BW	3					3	◆	730x420	688x390
1073 SQF IN	3					3	◆	730x420	688x390
1074 IN BW	4					4	◆	770x510	723x474
1074 SQF IN	4					4	◆	700x510	658x479
1064 SQIN TR	4	1			1	2	◆	650x510	555x476
1073 SQIN TR	3				1	2	◆	730x420	688x390
1063 RO IN	3					3	◆	580x500	560x480
1073 IN	3				1	2	◆	730x420	688x390
1074 IN	4				1	3	◆	770x510	658x479
1094 IN	4				1	3	◆	900x410	860x360
1095 IN	5				1	4	◆	900x510	860x470
1064 TR	4	1	2		1		◆	600x510	558x478
1066 TR	4	1	2		1		◆	590x500	558x478
1073 TR	3		1	1	1		◆	730x420	688x390
1074 TR	4		2	1	1		◆	700x510	658x479
1094 TR	4		2	1	1		◆	900x410	860x360
1095 TR	5	1	2	1	1		◆	900x510	860x470
1061 TRSS	4	1	2		1		◆	590x500	570x483
1060 MXT PRO	4	1	2		1		◆	590x500	570x483

** Subject to change without prior notice

◆ Integrated auto-ignition

Glen Appliances Pvt. Ltd.

I-34, DLF Industrial Area, Phase I, Faridabad.

Tel.: 0129-2254191-3

Email: enquiry@glenindia.com

Helpline : 9548-130-131

SHOP ONLINE
www.glenindia.com



*All sizes in cms